




Bælte-lifte
Crawlerlifts

PrisListe 2015

TRACKED PLATFORMS

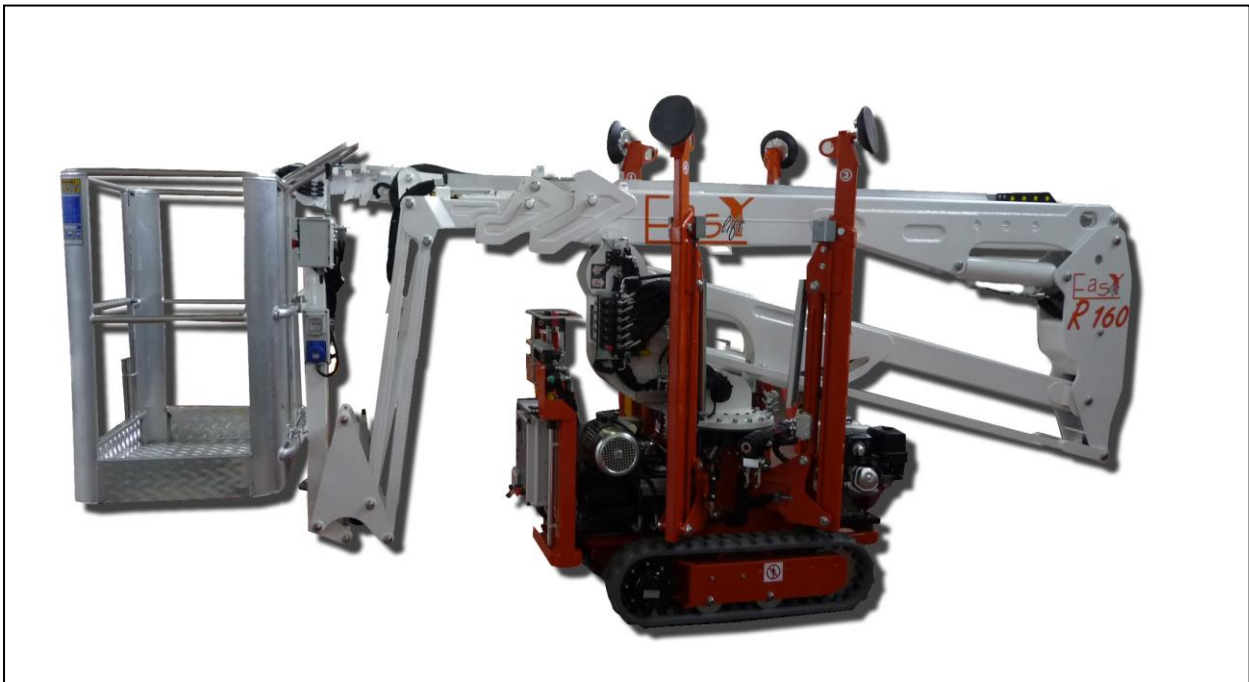

EASY LIFT R130



Max. working height: 12.20 m
 Max. working outreach (200 kg): 06.50 m
 Turntable rotation: 320°
 Aluminium basket 1100x700x1100 h mm with max. load capacity 200 Kg (2 operators)
 Petrol motor: Honda 9.6 kW
 Max. grade limit in translation: 30%
 Gross weight: 1600 kg
 Outrigger footprint: 2600x2600 mm
 Transport dimensions: length 4050 mm – width 890 mm – height 1980 mm
 Hydraulic and proportional controls
 Lock valves on cylinders
 Acoustic signal during translation
 Motor start/stop control from the basket
 Hand pump for emergency descent
 Locks for safety belts on the basket
 Rubber crawler-tracks
 Electric motor 220 V
 Hour counter
 Air/water plug
 Electrical plug 220 V
 Standard painting
 CE Certificate
 Use and maintenance handbook

LISTEPRIS/KAMPAGNEPRIS 280.000/230.000 DKK

OPTIONAL ACCESSORIES

Diesel engine (Hatz)	€ 1.350
Emergency pump 12/24V	€ 1.200
Basket rotation 60°+60°	€ 1.000
Cable control	€ 2.200
Cable control + Stabilizers self-leveling	€ 3.100
Radiocontrol	€ 5.000
Extending tracks	€ 1.700
Non-marking tracks	€ 650
Special painting	€ 1.000
Interphone	€ 1.400
Fiberglass basket	€ 1.000
Basket insulation 1.000V	€ 1.600
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Battery version (R130BA)	€ 9.000

EASY LIFT R150



Max. working height: 15.20 m
 Max. working outreach (200 kg): 08.50 m
 Turntable rotation: 320°
 Aluminium basket 1100x700x1100 h mm with max. load capacity 200 Kg (2 operators)
 Petrol motor: Honda 9.6 kW
 Max. grade limit in translation: 30%
 Gross weight: 2100 kg
 Outrigger footprint: 3400x3400 mm
 Transport dimensions: length 5350 mm – width 890 mm – height 1990 mm
 Hydraulic and proportional controls
 Lock valves on cylinders
 Acoustic signal during translation
 Motor start/stop control from the basket
 Hand pump for emergency descent
 Locks for safety belts on the basket
 Rubber crawler-tracks
 Electric motor 220 V
 Hour counter
 Air/water plug
 Electrical plug 220 V
 Standard painting
 CE Certificate
 Use and maintenance handbook


LISTEPRIK/KAMPAGNEPRIK 360.000/300.000 DKK

OPTIONAL ACCESSORIES

Diesel engine (Hatz)	€ 1.350
Emergency pump 12/24V	€ 1.200
Basket rotation 60°+60°	€ 1.000
Cable control	€ 2.200
Cable control + Stabilizers self-leveling	€ 3.100
Radiocontrol	€ 5.000
Extending tracks	€ 1.700
Non-marking tracks	€ 650
Special painting	€ 1.000
Interphone	€ 1.400
Fiberglass basket	€ 1.000
Basket insulation 1.000V	€ 1.600
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Battery version (R150BA)	€ 9.000



EASY LIFT R160

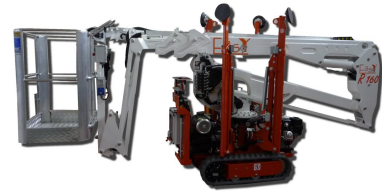

Max. working height: 15.60 m
Max. working outreach (120 kg): 07.50 m
Turntable rotation: 320°
Aluminium basket 1100x700x1100 h mm with max. load capacity 200 Kg (2 operators)
Petrol motor: Honda 9.6 kW
Max. grade limit in translation: 30%
Gross weight: 1950 kg
Outrigger footprint: 2800x2800 mm
Transport dimensions: length 4700 mm – width 890 mm – height 1950 mm
Hydraulic and proportional controls
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Rubber crawler-tracks
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTEPRIK/KAMPAGNEPRIK 380.000/315.000 DKK

OPTIONAL ACCESSORIES

Diesel engine (Hatz)	€ 1.350
Emergency pump 12/24V	€ 1.200
Basket rotation 60°+60°	€ 1.000
Cable control	€ 2.200
Cable control + Stabilizers self-leveling	€ 3.100
Radiocontrol	€ 5.000
Extending tracks	€ 1.700
Non-marking tracks	€ 650
Special painting	€ 1.000
Interphone	€ 1.400
Fiberglass basket	€ 1.000
Basket insulation 1.000V	€ 1.600
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Battery version (R160BA)	€ 9.000



EASY LIFT R180



Max. working height: 17.60 m
Max. working outreach (120 kg): 08.50 m
Turntable rotation: 320°
Aluminium basket 1100x700x1100 h mm with max. load capacity 200 Kg (2 operators)
Petrol motor: Honda 9.6 kW
Max. grade limit in translation: 30%
Gross weight: 2200 kg
Outrigger footprint: 3100x3100 mm
Transport dimensions: length 5280 mm – width 890 mm – height 1950 mm
Hydraulic and proportional controls
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Rubber crawler-tracks
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTEPRIK/KAMPAGNEPRIK 425.000/355.000 DKK

OPTIONAL ACCESSORIES

Diesel engine (Hatz)	€ 1.350
Emergency pump 12/24V	€ 1.200
Basket rotation 60°+60°	€ 1.000
Cable control	€ 2.200
Cable control + Stabilizers self-leveling	€ 3.100
Radiocontrol	€ 5.000
Extending tracks	€ 1.700
Non-marking tracks	€ 900
Special painting	€ 1.000
Interphone	€ 1.400
Fiberglass basket	€ 1.000
Basket insulation 1.000V	€ 1.600
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Battery version (R180BA)	€ 9.000



EASY LIFT R190



Max. working height: 18.50 m
Max. working outreach (120 kg): 11.00 m
Turntable rotation: 360°
Aluminium basket 1400x700x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Petrol motor: Honda 9.6 kW
Max. grade limit in translation: 30%
Gross weight: 2800 kg
Outrigger footprint: 3500x3500 mm/4200x2500 mm
Transport dimensions: length 4900 mm – width 890 mm – height 1980 mm
Hydraulic and proportional controls
Cable control
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Rubber crawler-tracks
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTEPRIS/KAMPAGNEPRIS 505.000/430.000 DKK

OPTIONAL ACCESSORIES

Diesel engine (Hatz)	€ 1.350
Emergency pump 12/24V	€ 1.200
Stabilizers self-leveling	€ 1.700
Radiocontrol	€ 5.000
Non-marking tracks	€ 900
Special painting	€ 1.000
Interphone	€ 1.400
Fiberglass basket	€ 1.000
Basket insulation 1.000V	€ 1.600
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Battery version (R190BA)	€ 12.000



EASY LIFT R210



Max. working height: 21.20 m
Max. working outreach (120 kg): 11.00 m
Turntable rotation: 360°
Aluminium basket 1400x700x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Petrol motor: Honda 9.6 kW
Max. grade limit in translation: 30%
Gross weight: 3000 kg
Outrigger footprint: 3500x3500 mm/4200x2500 mm
Transport dimensions: length 5850 mm – width 890 mm – height 1930 mm
Electro-hydraulic controls Danfoss
Cable control
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Rubber crawler-tracks
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTEPRIK/KAMPAGNEPRIK 625.000/500.000 DKK

OPTIONAL ACCESSORIES

Diesel engine (Hatz)	€ 1.350
Emergency pump 12/24V	€ 1.200
Stabilizers self-leveling	€ 1.700
Radiocontrol	€ 3.350
Non-marking tracks	€ 900
Special painting	€ 1.000
Interphone	€ 1.400
Fiberglass basket	€ 1.000
Basket insulation 1.000V	€ 1.600
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Battery version (R210BA)	€ 12.000



EASY LIFT R260



Max. working height: 26.00 m
Max. working outreach (120 kg): 13.50 m
Turntable rotation: 360°
Aluminium basket 2000x800x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Diesel motor: Hatz 25.7 kW
Max. grade limit in translation: 30%
Gross weight: 4800 kg
Outrigger footprint: 3900x3800 mm/4400x3200 mm/3200x4400 mm
Transport dimensions: length 6600 mm – width 1400 mm – height 2000 mm
Electro-hydraulic controls Danfoss
Radiocontrol
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Extensible outriggers to facilitate loading on truck
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Rubber crawler-tracks
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTEPRIS/KAMPAGNEPRIS 930.000/745.000 DKK

OPTIONAL ACCESSORIES

Emergency pump 12/24V	€ 1.200
Stabilizers self-leveling	€ 1.700
Electric motor 380V	€ 2.600
Hydraulic generator 4,5 Kw	€ 3.400
Non-marking tracks	€ 1.200
Special painting	€ 2.000
Interphone	€ 1.400
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Hybrid version (diesel + battery) (R260HY)	€ 10.000



EASY LIFT R260WBA

Max. working height: 25.00 m
Max. working outreach (120 kg): 13.00 m
Turntable rotation: 360°
Aluminium basket 2000x800x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Battery pack: 36V – 485 Ah
Max. grade limit in translation: 30%
Gross weight: 4800 kg
Outrigger footprint: 3500x3100 mm/4100x2300 mm
Transport dimensions: length 6850 mm – width 800 mm – height 1900 mm
Electro-hydraulic controls Danfoss
Radiocontrol
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Extensible outriggers to facilitate loading on truck
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Non-marking wheels
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTEPRIS/KAMPAGNEPRIS 970.000/775.000 DKK

OPTIONAL ACCESSORIES

Emergency pump 12/24V	€ 1.200
Stabilizers self-leveling	€ 1.700
Electric motor 380V	€ 2.600
Special painting	€ 2.000
Interphone	€ 1.400
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Hybrid version (diesel + battery) (R260WHY)	€ 5.000



EASY LIFT R300



Max. working height: 30.00 m
Max. working outreach (120 kg): 14.50 m
Turntable rotation: 360°
Aluminium basket 2000x800x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Diesel motor: Hatz 25.7 kW
Max. grade limit in translation: 30%
Gross weight: 6000 kg
Outrigger footprint: 3900x3800 mm/4400x3200 mm/3200x4400 mm
Transport dimensions: length 6700 mm – width 1400 mm – height 2000 mm
Electro-hydraulic controls Danfoss
Radiocontrol
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Extensible outriggers to facilitate loading on truck
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Rubber crawler-tracks
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTEPRIS/KAMPAGNEPRIS 1.050.000/840.000 DKK

OPTIONAL ACCESSORIES

Emergency pump 12/24V	€ 1.200
Stabilizers self-leveling	€ 1.700
Electric motor 380V	€ 2.600
Hydraulic generator 4,5 Kw	€ 3.400
Non-marking tracks	€ 1.200
Special painting	€ 2.000
Interphone	€ 1.400
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Hybrid version (diesel + battery) (R300HY)	€ 10.000



EASY LIFT R300WBA

Max. working height: 29.20 m
Max. working outreach (120 kg): 13.00 m
Turntable rotation: 360°
Aluminium basket 2000x800x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Battery pack: 36V – 485 Ah
Max. grade limit in translation: 30%
Gross weight: 6000 kg
Outrigger footprint: 3500x3100 mm/4100x2300 mm
Transport dimensions: length 6900 mm – width 800 mm – height 1900 mm
Electro-hydraulic controls Danfoss
Radiocontrol
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Extensible outriggers to facilitate loading on truck
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Non-marking wheels
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTEPRIS/KAMPAGNEPRIS 1.100.000/880.000 DKK

OPTIONAL ACCESSORIES

Emergency pump 12/24V	€ 1.200
Stabilizers self-leveling	€ 1.700
Electric motor 380V	€ 2.600
Special painting	€ 2.000
Interphone	€ 1.400
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Hybrid version (diesel + battery) (R300WHY)	€ 5.000



EASY LIFT R360

Max. working height: 35.40 m
Max. working outreach (120 kg): 14.50 m
Turntable rotation: 360°
Aluminium basket 2000x800x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Diesel motor: Hatz 25.7 kW
Max. grade limit in translation: 30%
Gross weight: 6500 kg
Outrigger footprint: 3950x6200 mm/5200x5200 mm
Transport dimensions: length 7250 mm – width 1400 mm – height 2100 mm
Electro-hydraulic controls Danfoss
Radiocontrol
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Rubber tracks
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTE/KAMPAGNEPRIS 1.450.000/1.160.000 DKK

OPTIONAL ACCESSORIES

Emergency pump 12/24V	€ 1.200
Stabilizers self-leveling	€ 1.700
Electric motor 380V	€ 2.600
Hydraulic generator 4,5 Kw	€ 3.400
Non-marking tracks	€ 1.200
Special painting	€ 2.000
Interphone	€ 1.400
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Hybrid version (diesel + battery) (R360HY)	€ 10.000



EASY LIFT R360WBA

Max. working height: 35.40 m
Max. working outreach (120 kg): 14.50 m
Turntable rotation: 360°
Aluminium basket 2000x800x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Battery: Traction 48V – 480 Ah
Max. grade limit in translation: 30%
Gross weight: 6500 kg
Outrigger footprint: 3950x6200 mm/5200x5200 mm
Transport dimensions: length 7400 mm – width 1250 mm – height 2100 mm
Electro-hydraulic controls Danfoss
Radiocontrol
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Hand pump for emergency descent
Locks for safety belts on the basket
Outreach limiting device
Non-marking wheels
Electric motor 220 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTE/KAMPAGNEPRIS 1.470.000/1.180.000 DKK

OPTIONAL ACCESSORIES

Emergency pump 12/24V	€ 1.200
Stabilizers self-leveling	€ 1.700
Electric motor 380V	€ 2.600
Special painting	€ 2.000
Interphone	€ 1.400
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Hybrid version (diesel + battery) (R360WHY)	€ 5.000



EASY LIFT R410WBA

Max. working height: 41.10 m
Max. working outreach (120 kg): 14.50 m
Turntable rotation: 360°
Aluminium basket 2000x800x1100 h mm with max. load capacity 200 Kg (2 operators)
Basket rotation: 90°+90°
Battery: Traction 48V – 480 Ah
Max. grade limit in translation: 30%
Gross weight: 9600 kg
Outrigger footprint: 3800x7600 mm/6000x6100 mm/7100x4600 mm
Transport dimensions: length 8300 mm – width 1300 mm – height 2300 mm
Electro-hydraulic controls Danfoss
Radiocontrol
Lock valves on cylinders
Acoustic signal during translation
Motor start/stop control from the basket
Emergency pump 24V
Locks for safety belts on the basket
Outreach limiting device
Non-marking wheels
Electric motor 380 V
Hour counter
Air/water plug
Electrical plug 220 V
Standard painting
CE Certificate
Use and maintenance handbook

LISTE / KAMPAGNEPRIS 1.700.000 / 1.360.000 DKK

OPTIONAL ACCESSORIES

Stabilizers self-leveling	€ 1.700
Special painting	€ 2.000
Interphone	€ 1.400
Working lamp on the basket	€ 200
Inclinometer with acoustic alarm	€ 700
4 pads for stabilizers	€ 350
Hybrid version (diesel + battery) (R410WHY)	€ 10.000

